


TUNGSTEN

SMART-HEAT™ ELECTRIC

NOW WITH A LIFETIME ELEMENT WARRANTY

An infrared electric heater blending aesthetics and function

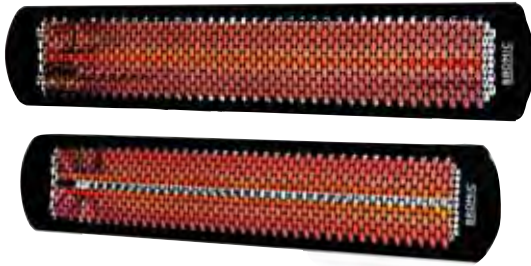

Standard Colours

Matte Black

Matte White - 4000 and 6000 watt models only

Witness the art of smart-heating with Bromic Heating's new Tungsten Smart-Heat™ Electric, an infrared electric heater blending aesthetics with function.

The Tungsten Smart-Heat™ Electric is stylishly designed to provide efficient directional heating for commercial and residential locations.

Available in 4 models of varying heating power and compatible with smart control systems to enable precise dimming control. Included are wall and ceiling mounting brackets to allow adjustable angle of the heating direction with simple one-touch on/off switch.

Heaters are equipped with a spectral reflector for excellent radiant heat output and are weatherproof.




TUNGSTEN

SMART-HEAT™ ELECTRIC


INSTALLATION CLEARANCES FOR 2000W & 3000W MODELS

(All measurements in inches)

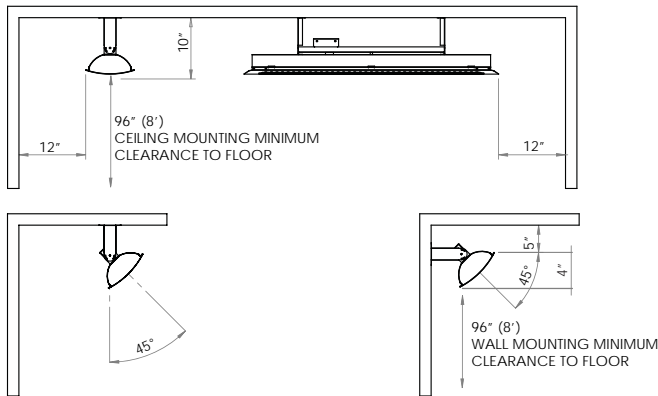


INSTALLATION CLEARANCES FOR 4000W & 6000W MODELS

(All measurements in inches)

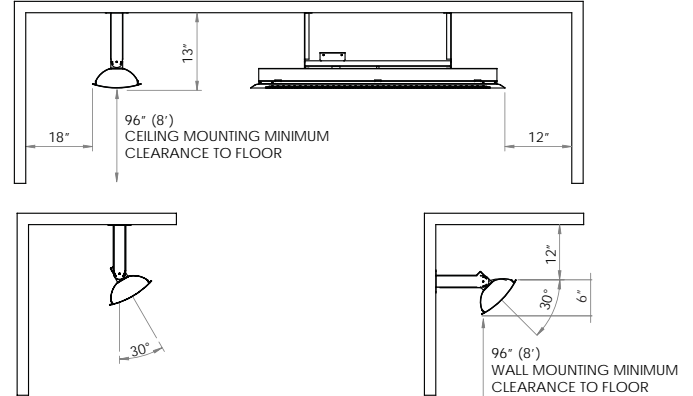


*Alternatively, short mounting brackets can be used for wall mounting of the 4000w & 6000w models to position the heater closer to the wall. Short mounting brackets must be purchased separately.



HEAT DISTRIBUTION:

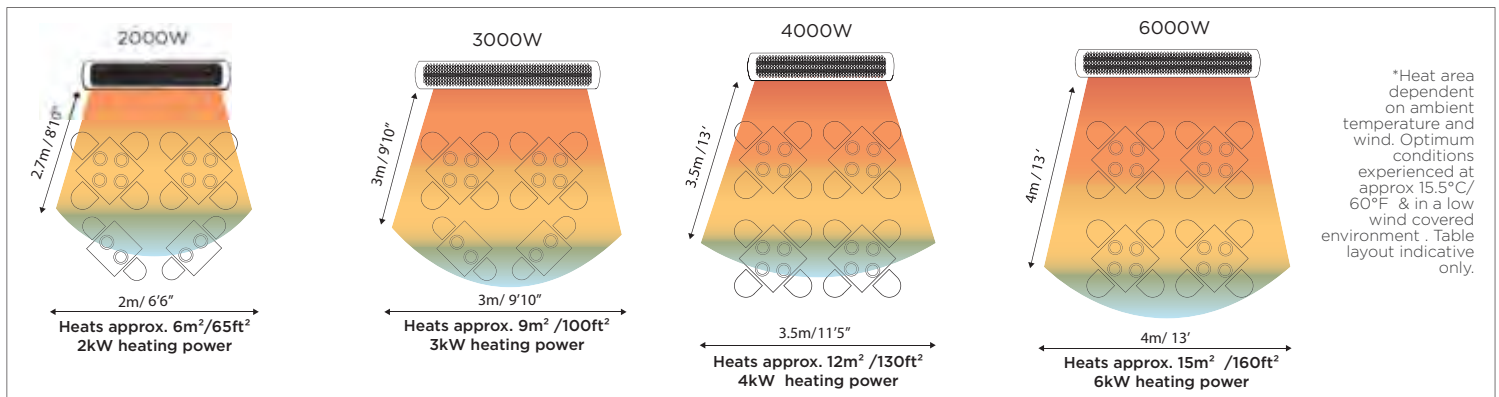

2000W & 4000W

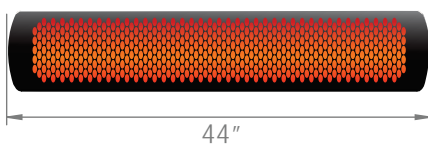

3000W & 6000W

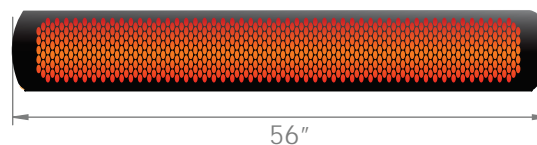

SPECIFICATIONS:

Model	2000W	3000W	4000W	6000W
Part no.	BH0420002	BH0420003	BH0420004	BH0420005
No. of Elements	Single element	Single element	Double element	Double element
Bracket Length	6.5"	6.5"	9.5"	9.5"
Power (Watts)	2000W	3000W	4000W	6000W
Heating Area*	up to 65ft ²	up to 100ft ²	up to 130ft ²	up to 160ft ²
Power connection required (Volts/Amps)	220 V / 9 A	220 V / 13.6 A	220 V / 18.1A	220 V / 27.2A
Dimension (W"xD"xH")	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"	44" x 8.5" x 3.5"	56" x 8.5" x 3.5"
Minimum Mounting height requirement to ground	Ceiling Mounting - 96" (8') / Wall Mounting - 96" (8')			
Weight (lb)	19.8lb	22lb	19.8lb	22lb
Finish	Black High Temperature Coating			

Product must only be installed and serviced by a licensed and authorised technician.
Product manual must be read before installing or servicing this product.

*Heating areas are based on protected environment with mounting height of 96" (8'). For unprotected and extremely cold and windy environments heating areas can be less. Please contact Bromic Heating for further advice.

4005951
CONFORMS TO UL STD. NO. 2021
CERTIFIED TO CSA STD. C22.2 NO.46

